

**AUTOMATIC ROLLER IRONER WITH ROLLER SPEED CONTROL + VACUUM + NOMEX FABRIC AND MAXPRESS COATING, Ø 300X2000 MM S-200/30 AVL**

Ref: 0912.12.019  
 Grandimpianti

Specially-processed aluminum basin that ensures long life and energy conservation.

Roller supported by bearings.

Front loader use: The ironer can be installed against a wall.

Finger safety band protects the user in case of mismanouver.

Electronic control unit that monitor all machine running parameters and optimizes performance and energy consumption.

Safety thermostat avoids undesirable overheating.

Wide pedal for press movement control.


Manual device for lifting the basin in power down events.

Automatic press operation.

V = Roller speed control.

AV = Roller speed control + vacuum + Nomex fabric.

AVL = Roller speed control + vacuum + Nomex fabric and Maxpress coating.

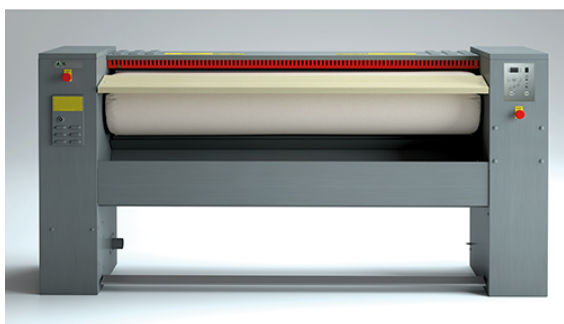

FEATURES

Dimensions (WDH)	2600x500x1100 mm
Total power	17.46 kW
Heating power	16.8 kW
Power supply	400V/3/50 Hz
Capacity (H.R. 10-15%); (H.R. 20-25%); (H.R. 40-45%)	52/79 kg/h , 38/55 kg/h , 25/32 kg/h
Roller	Ø 300x2000 mm
Speed roller	2 - 4 m/min
Air consumption	200 m3/h

Flue outlet 55 mm

---

Net weight 294 kg

---

Packaging dimensions 750x2650x1300 mm

---